



Hitting The Start Button?

SANDPIPER IS HERE TO HELP.

After long periods of shut down it is essential the proper attention be given to pumping equipment in order to continue providing reliable fluid transfer. **Following these steps will ensure a problem free restart.**

- **Blow out air lines** – Condensation can form in airlines causing rust and debris to be blown into the air valve and pilot valve
- **Change inline filter element** – If not changed recently, filter elements may become dried and clogged robbing the pumps of required PSI and SCFM.
- **Flush the pump** – Solids may have settled in the chambers potentially causing damage during restart to shafts and diaphragms. If flushing is not an option, start the pump at low pressure to agitate fluid and solids within chambers. Do not flush with pressurized water or steam.
- **Check your stock** – In the case of failure, it is critical to have the necessary parts and kits on the shelf to reduce process downtime.



Don't get caught with broken shafts and damaged diaphragms!



Rebuild?

SANDPIPER has the kit for your pump in stock. Whether your repairing the Air End – Main Air Valve Assembly, Pilot Assembly, Gaskets, and O-rings; or Wet End – Diaphragms, seats, balls/flaps, and O-rings. SANDPIPER's World Class 3-5 was possible.



Refresh?


Don't need the complete Air and Pilot valve assemblies? SANDPIPER offers refresh kits for soft components such as – Main Air Valve Gaskets, Pilot valve O-rings and Gaskets, Shaft Seals



Need Help?

SANDPIPER pump tags contain a QR code for easy identification. By scanning this tag you access pump specific information including kits, service manual with parts list, repair videos, and troubleshooting.

SANDPIPER's Externally Serviceable Air Distribution System (ESADS+Plus) allows for quick and easy access to the pilot and spool valves without removing the pump from service.

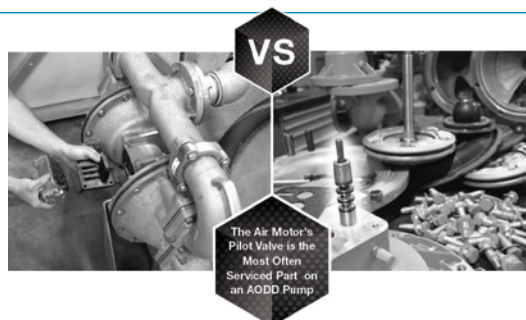

For more information please visit - www.sandpiperpump.com/resources/mobile-app

