

# F15 METALLIC FOOD PROCESSING PUMP TECHNICAL DATA SHEET

## SERIES

### FDA COMPLIANT PUMPS

For a variety of food processing, pharmaceutical and cosmetic industry applications

## PERFORMANCE

### SUCTION / DISCHARGE PORT SIZE

- 2" Sanitary Clamp

### CAPACITY

#### ELASTOMERIC AND TPE FITTED

- 0 to 71 gallons per minute (0 to 268 LPM)

#### PTFE FITTED

- 0 to 65 gallons per minute (0 to 246 LPM)

### AIR DISTRIBUTION VALVE

- No-lube, no-stall design

### SOLIDS-HANDLING

- Up to .187 in. (4.76mm)

### HEADS UP TO

- 110 psi or 254 ft. of water  
(7.6 Kg/cm<sup>2</sup> or 76 meters)

### MAXIMUM OPERATING PRESSURE

- 125 psi (8.6 bar)

### DISPLACEMENT/STROKE ELASTOMERIC AND TPE FITTED


- .25 Gallon / .95 liter

### PTFE FITTED


- .13 Gallon / 1.17 liter

### WEIGHTS


- Stainless Steel 57 lbs. (25.85kg)

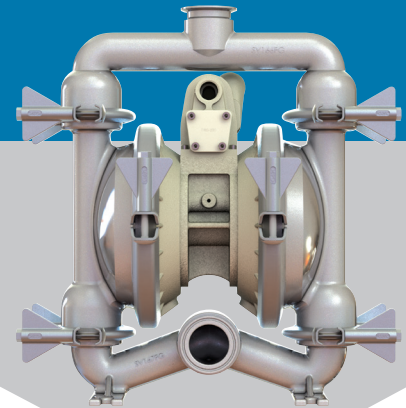

### ELASTOMERIC AND TPE FITTED

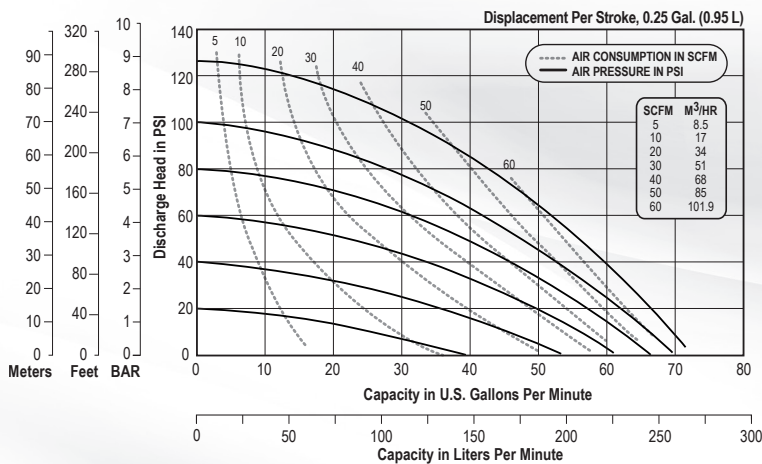

### PTFE FITTED

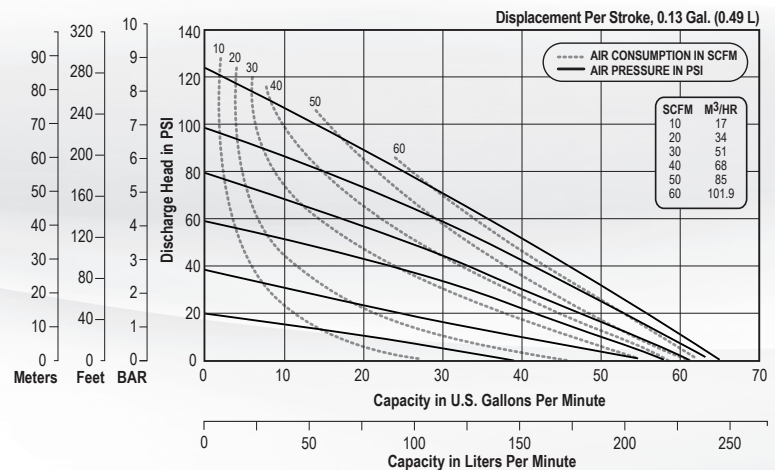

### 5 YEAR LIMITED PRODUCT WARRANTY

5 Year Guarantee for defects in material or workmanship. See [sandpiperpump.com/content/warranty-certifications](http://sandpiperpump.com/content/warranty-certifications) for complete warranty, including terms and conditions, limitations and exclusions.



### USE ONLY GENUINE SANDPIPER PARTS




All certification, standards, guarantees & warranties originally supplied with this pump will be invalidated by the use of service parts not identified as "Genuine SANDPIPER Parts."

# DIMENSIONS

## Food Processing Metallic

Dimensions in inches (mm dimensions in brackets).


The dimensions on this drawing are for reference only. A certified drawing can be requested if physical dimensions are needed.

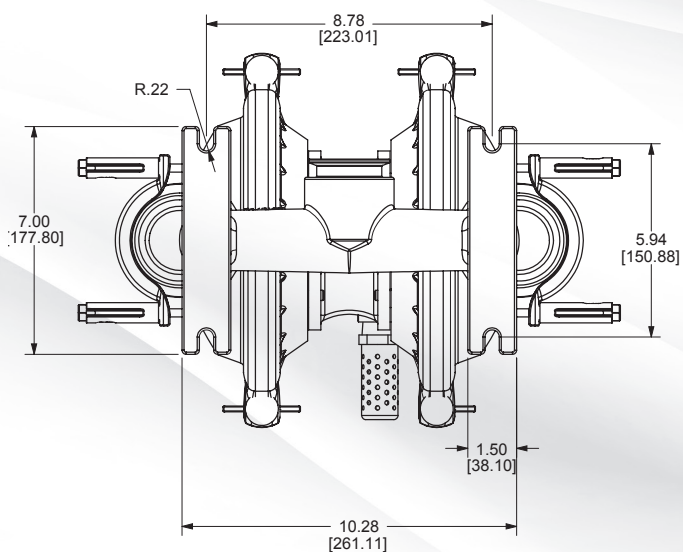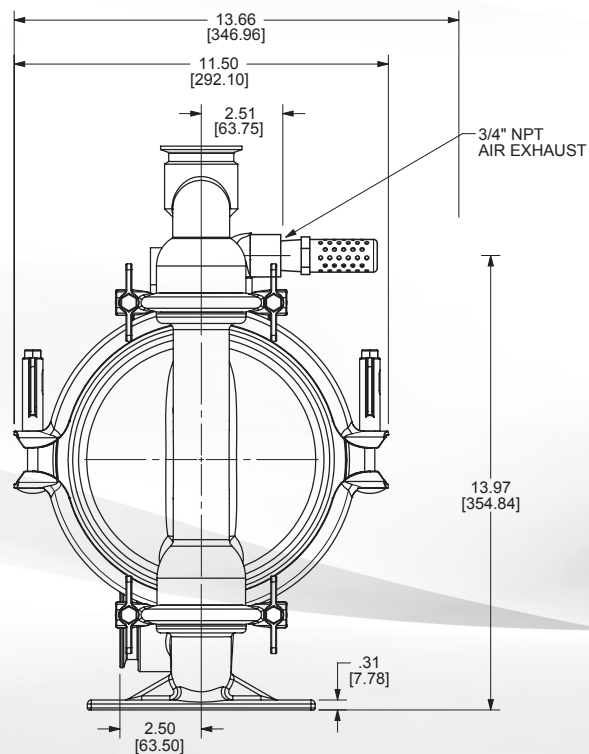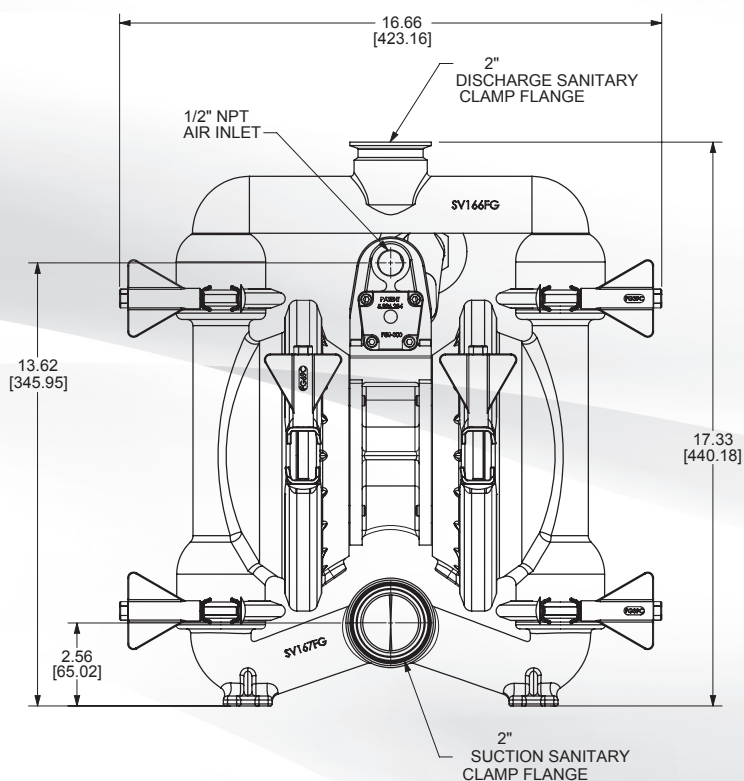

BOTTOM VIEW

# EXPLANATION OF PUMP NOMENCLATURE

**Your Model #:** F  
(fill in from  
pump nameplate)

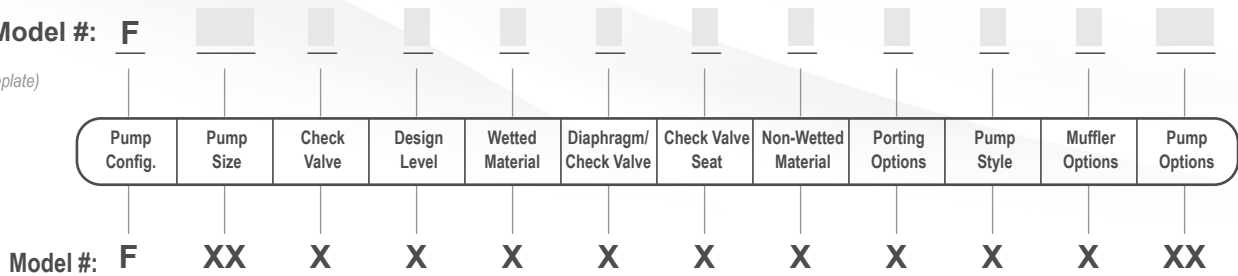

## PUMP BRAND

F Food Processing

## PUMP SIZE

15 1-1/2"

## CHECK VALVE TYPE

B Ball

## DESIGN LEVEL

1 Design Level

## WETTED MATERIAL

S Stainless Steel

## DIAPHRAGM/CHECK VALVE MATERIALS

D FDA Santoprene / PTFE  
H Hytrel/Hytrel  
K PTFE with FDA Hytrel Backer / PTFE  
Z One-Piece Bonded / PTFE

## CHECK VALVE SEAT

D FDA Santoprene  
H FDA Hytrel  
S Stainless Steel

## NON-WETTED MATERIAL OPTIONS

N Nickel Plated Aluminum

## PORTING OPTIONS

T 2" Sanitary Clamp

## PUMP STYLE

F Food

## MUFFLER OPTIONS

6 Metal Muffler

## PUMP OPTIONS

0 None

## MATERIALS

### Material Profile:

**CAUTION!** Operating temperature limitations are as follows:

**CONDUCTIVE ACETAL:** Tough, impact resistant, ductile. Good abrasion resistance and low friction surface. Generally inert, with good chemical resistance except for strong acids and oxidizing agents.

**EPDM:** Shows very good water and chemical resistance. Has poor resistance to oils and solvents, but is fair in ketones and alcohols.

**FKM (FLUOROCARBON):** Shows good resistance to a wide range of oils and solvents; especially all aliphatic, aromatic and halogenated hydrocarbons, acids, animal and vegetable oils. Hot water or hot aqueous solutions (over 70°F(21°C)) will attack FKM.

**HYTREL®:** Good on acids, bases, amines and glycols at room temperatures only.

**NEOPRENE:** All purpose. Resistance to vegetable oils. Generally not affected by moderate chemicals, fats, greases and many oils and solvents. Generally attacked by strong oxidizing acids, ketones, esters and nitro hydrocarbons and chlorinated aromatic hydrocarbons.

**NITRILE:** General purpose, oil-resistant. Shows good solvent, oil, water and hydraulic fluid resistance. Should not be used with highly polar solvents like acetone and MEK, ozone, chlorinated hydrocarbons and nitro hydrocarbons.

**NYLON:** 6/6 High strength and toughness over a wide temperature range. Moderate to good resistance to fuels, oils and chemicals.

### Operating Temperatures:

Max. Min.

190°F  
88°C

-20°F  
-29°C

280°F  
138°C

-40°F  
-40°C

350°F  
177°C

-40°F  
-40°C

220°F  
104°C

-20°F  
-29°C

200°F  
93°C

-10°F  
-23°C

190°F  
88°C

-10°F  
-23°C

180°F  
82°C

32°F  
0°C

**POLYPROPYLENE:** A thermoplastic polymer. Moderate tensile and flex strength. Resists strong acids and alkali. Attacked by chlorine, fuming nitric acid and other strong oxidizing agents.

180°F  
82°C

32°F  
0°C

**PVDF:** (Polyvinylidene Fluoride) A durable fluoroplastic with excellent chemical resistance. Excellent for UV applications. High tensile strength and impact resistance.

250°F  
121°C

0°F  
-18°C

**SANTOPRENE®:** Injection molded thermoplastic elastomer with no fabric layer. Long mechanical flex life. Excellent abrasion resistance.

275°F  
135°C

-40°F  
-40°C

**UHMW PE:** A thermoplastic that is highly resistant to a broad range of chemicals. Exhibits outstanding abrasion and impact resistance, along with environmental stress-cracking resistance.

180°F  
82°C

-35°F  
-37°C

**URETHANE:** Shows good resistance to abrasives. Has poor resistance to most solvents and oils.

150°F  
66°C

32°F  
0°C

**VIRGIN PTFE:** (PFA/TFE) Chemically inert, virtually impervious. Very few chemicals are known to chemically react with PTFE; molten alkali metals, turbulent liquid or gaseous fluorine and a few fluoro-chemicals such as chlorine trifluoride or oxygen difluoride which readily liberate free fluorine at elevated temperatures.

220°F  
104°C

-35°F  
-37°C

Maximum and Minimum Temperatures are the limits for which these materials can be operated. Temperatures coupled with pressure affect the longevity of diaphragm pump components. Maximum life should not be expected at the extreme limits of the temperature ranges.

## Metals:

**ALLOY C:** Equal to ASTM494 CW-12M-1 specification for nickel and nickel alloy.

**STAINLESS STEEL:** Equal to or exceeding ASTM specification A743 CF-8M for corrosion resistant iron chromium, iron chromium nickel and nickel based alloy castings for general applications. Commonly referred to as 316 Stainless Steel in the pump industry.

For specific applications, always consult the Chemical Resistance Chart.



**NOTE:** See service manual for ATEX details.